

ISO9001: 2000

ISO14001: 2004

## APPROVAL SPECIFICATIONS

Title. TACT SWITCH

Part NO. KAN0652

Customer's Part NO.

Model:

### Customer's Approval Requested.

Please return this copy as a certification of your approval.

Checked by: \_\_\_\_\_ Date: \_\_\_\_\_

Approved by: \_\_\_\_\_ Date: \_\_\_\_\_

注：若有本规格书以外的特殊规格要求,请与我司贸易部联系；

APPROVE	REVIEW	POLT
黄蜀东	关林	曹盖

WENZHOU GANGYUAN ELECTRONICS CO., LTD.


# APPROVAL SPECIFICATIONS

CUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
		KAN0652	TACT SWITCH	A

## A. Specification & meanings

The name of the tact switch is composed by type and specification, the particular meaning of the type、specification and code is as follows.

KAN0652—□□□ □ □

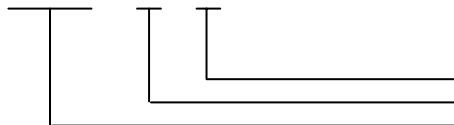

Press force (refer to chart 3)

Stem color (refer to chart 2)

Product height (refer to chart 1)

1. Product height: It is denoted by three figures; For examples, "043" expresses the product which the total height is 4.3mm,as chart 1 shows:

Code	Product height	Code	Product height	Code	Product height
043	4.3	080	8.0		
045	4.5	090	9.0		
050	5.0	095	9.5		
060	6.0				
070	7.0				
073	7.3 (Joint stem)				
075	7.5				

2. Stem color: It is expressed by a figure, as chart 2 shows:

Color	Black	Red
Code	1	2

3. Operating force: An English letter expresses it, unite: Newton (N),as chart 3 shows:

force Code	Spec	Operating	
		Press force	Return force
A	1.0	1.0±0.3	0.2min
B	1.6	1.6±0.5	0.4min
C	2.6	2.6±0.5	0.6min

Examples: "KAN0652-0431B" denotes the tact switch with 6×6 base, the height is 4.3mm,the stem is black , the operating force is 1.6N.

APPROVE BY	黃蜀东 09.02.15	CHECKED BY	关林 09.02.15	PRPARE BY	曹 盖 09.02.15
------------	--------------	------------	-------------	-----------	--------------

# APPROVAL SPECIFICATIONS

CUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
		KAN0652	TACT SWITCH	A

**1、概述**

**GENERAL**

**1.2 适用范围**

**APPLICATION**

此规格书适用于机械式轻触开关的相关要求

This specification is applied to the requirements for TACTILE SWITCH (MECHANICAL CONTACT)

**1.3 工作温度范围**

**Operating Temperature Range**

−20°C~70°C(在标准大气压、标准湿度条件下)

-20°C~70°C (Normal humidity, normal air pressure)

**1.4 贮藏温度范围**

**Storage Temperature Range**

−30°C~80°C(在标准大气压、标准湿度条件下)

-30°C~80°C (Normal humidity, normal air pressure)

**1.5 测试条件**

**Test Conditions**

在没有其它特定的条件下，应该在以下的条件下进行测试和测量：

Unless otherwise specified, tests and measurement shall be made in the following standard conditions:

常温.....5°C~35°C

Normal temperature.....5°C~35°C

标准湿度.....相对湿度 25%~85%

Normal humidity.....relative humidity 25%~85%

标准大气压.....86KPa~106Kpa

Normal air pressure.....86Kpa~106Kpa

在制造过程中，测试和测量应该在以下的条件下进行：

If any doubt arise from the judgment, tests shall be conducted at the following conditions:

温度.....20°C±2°C

Temperature.....20°C±2 °C

相对湿度.....65%±5%

Relative humidity.....65%±5%

环境气压.....86KPa~106Kpa

Air pressure.....86KPa~106Kpa

APPROVE BY	黄蜀东 09.02.15	CHECKED BY	关林 09.02.15	PRPARE BY	曹 盖 09.02.15
------------	--------------	------------	-------------	-----------	--------------

# APPROVAL SPECIFICATIONS

CUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
		KAN0652	TAUT SWITCH	A

## 2、 详细说明

### Detailed specification

2.1 外观: 应无影响、降低产品性能的缺陷;

Appearance: There should be no defects that affect the serviceability of product.

2.2 结构尺寸和安装尺寸: 应符合装配图要求;

Style and dimension: shall conform to the assemble drawings.

2.3 操作形式: 有触觉反应的操作

Type of actuating: Tactile feedback.

2.4 开关结构: 单回路单输出(具体的触点结构在装配图中已绘出);

Contact arrangement: 1 pole, 1 throw

(Details of contact arrangement are given in the assembly drawings.)

2.5 开关工作额定值: DC 12V, 50mA (有效值)

Ratings: 12V DC, 50mA (effective value)

## 3. 电气性能:

### ELECTRICAL SPECIFICATION

项 目 ITEM		试 验 条 件 TEST CONDITIONS	要 求 REQUIREMENTS
1	接触电阻 Contact Resistance	在以 5V 10mA 的直流电源或不低于 1KHz 的交流电源的电路中, 以一个等于 2 倍按力的静负荷施加于手柄中心  Applying a static load of 2 times operating force to the center of the stem, measurements shall be made by 5V DC 10mA or more than 1KHZ AC small-current contact resistance meter.	$\leq 50\text{m}\Omega$
2	绝缘电阻 Insulation Resistance	在端子之间施加 DC 100V /1min 的条件下, 测量端子之间底座、盖板的电阻值  Measurement shall be made following application of 100V DC potential, across terminals, and across terminals and cover, for one minute.	$\geq 100\text{M}\Omega$
3	介质耐压 Dielectric voltage proof	在端子之间施加 250V AC(50HZ 或 60HZ) /1min 250V AV (50HZ or 60HZ) shall be applied across terminals, for one minute.	无击穿、无飞弧 There should be no breakdown and flashover
APPROVE BY	黄蜀东 09.02.15	CHECKED BY	关林 09.02.15
PRPARE BY	曹 盖 09.02.15		

# APPROVAL SPECIFICATIONS

CUSTOMER		CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
			KAN0652	TACT SWITCH	A
项目 ITEM		试验条件 TEST CONDITIONS			要求 REQUIREMENTS
4	触点弹力 Bounce	<p>按照正常使用时的力度轻按手柄中心（每秒 3~4 次），在导通和断开过程中测试开关弹力</p> <p>Lightly striking the center of the stem at a rate encountered in normal use (3 to 4 times per second), and bounce shall be tested at "ON" and "OFF"</p> <p>开关 Switch</p> <p>10V DC</p> <p>10KΩ</p> <p>示波器 Oscillograph</p> <p>"导通" "ON"</p> <p>"断开" "OFF"</p>		ON-3msec.max OFF-8msec.max	
<b>4. 机械性能:</b> MECHANICAL SPECIFICATION					
1	按力 Operating Force	<p>开关垂直于操作方向放置，在开关驱动件顶端中心逐渐施力，测量开关导通所需的最大力度。</p> <p>Placing the switch such that the direction of switch operation is vertical and then gradually increasing the load applied to the center of the stem, the maximum load required for the switch to come to a stop shall be measured.</p>		refer to chart 3	
APPROVE BY		黄蜀东 09.02.15	CHECKED BY	关林 09.02.15	PRPARE BY
					曹 盖 09.02.15

# APPROVAL SPECIFICATIONS

CUSTOMER		CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
			KAN0652	TACT SWITCH	A
项目 ITEM		试验条件 TEST CONDITIONS			要求 REQUIREMENTS
2	最大行程 Full Travel	开关垂直于操作方向放置，以一个等于 2 倍按力的静负荷施加在开关驱动件顶端中心，测量顶端移动的距离。 Placing the switch such that the direction of switch operation is vertical and then applying static load of 2times operating force to the center of the stem; the travel distance for the switch to come to a stop shall be measured.			0.25±0.1mm
3	回弹力 Return Force	开关垂直于操作方向放置，在开关驱动件顶端中心下降至全行程后，测量顶端向自由位置转换的力度。 The sample switch is installed such that the direction of switch operation is vertical and upon depressing the stem in its center to the whole travel distance, the force of the stem to return to its free position shall be measured.			refer to chart 3
4	停止强度 Stop Strength	开关垂直于操作方向放置，从操作方向向驱动件施加 30N 的静负荷持续 1min。 Placing the switch such that the direction of switch operation is vertical, and then a static load of 30N shall be applied in the direction of stem operation for a period of 1 min.			无机械和电气损坏 There shall be no sign of damage mechanically and electrically.
5	手柄拔出 强度 Stem Strength	开关垂直于操作方向放置，反方向实施最大操作力，并测量手柄的行程范围。 Placing the switch such that the direction of switch operation is vertical, and then the maximum force to withstand a pull applied opposite to the direction of stem operation shall be measured.			20N.min.
APPROVE BY		黄蜀东 09.02.15	CHECKED BY	关林 09.02.15	PRPARE BY
					曹 盖 09.02.15

# APPROVAL SPECIFICATIONS

CUSTOMER		CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
			KAN0652	TACT SWITCH	A
项目 ITEM		试验条件 TEST CONDITIONS			要求 REQUIREMENTS
6	可焊性 Solderability	在以下设定条件下进行测量: Measurements shall be made following the test set forth below: (1) 焊接温度: $245 \pm 5^\circ\text{C}$ Solder temperature : $245 \pm 5^\circ\text{C}$ (2) 浸入时间: $2s \pm 0.5s$ Immersion time: $2s \pm 0.5s$ 对于其它步骤参考《GB 5095.6—86》试验 12a The other steps please refer to 《GB 5095.6-86》 TEST 12a			除边缘外涂层应均匀覆盖 90% 以上 Except for the edge, the coating should cover a minimum 90%
<b>5、极限电气性能:</b> ENVIRONMENTAL SPECIFICATION					
1	低温测试 Resistance to low temperature	样品应放在常温及标准湿度的环境中 1 小时后，根据下面的测试要求进行测试: Following the test set forth below the sample shall be left in normal temperature and humidity conditions for 1 h before measurements are made: (1) 温度: $-30 \pm 2^\circ\text{C}$ Temperature : $-30 \pm 2^\circ\text{C}$ (2) 时间: 96h Time:96h			接触电阻: $\leq 200\text{m}\Omega$ Contact resistance: $\leq 200\text{m}\Omega$ 项目 3,4.1,4.2,4.3 Item 3,4.1,4.2,4.3
APPROVE BY		黄蜀东 09.02.15	CHECKED BY	关林 09.02.15	PRPARE BY
					曹 盖 09.02.15

# APPROVAL SPECIFICATIONS

CUSTOMER		CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION												
			KAN0652	TACT SWITCH	A												
项目 ITEM		试验条件 TEST CONDITIONS			要求 REQUIREMENTS												
2	高温测试 Heat resistance	样品应放在常温及标准湿度的环境中 1 小时后，根据下面的测试要求进行测试： <b>Following the test set forth below the sample shall be left in normal temperature and humidity conditions for 1 h before measurements are made:</b> (1) 温度：80±2°C temperature:80±2°C (2) 时间：96h time: 96h			接触电阻：≤200mΩ Contact resistance: ≤200mΩ 项目 3,4.1,4.2,4.3 Item 3,4.1,4.2,4.3												
3	温度周期性测试 Change of temperature	样品应放在常温及标准湿度的环境中 1 小时后，根据下面的测试要求进行 5 次循环的温度周期性测试： 测试期间样品应保持干燥 <b>After 5 cycles of following conditions, the sample shall be allowed to stand under normal temperature and humidity conditions for 1 h. and measurements shall be made. During the test waterdrops shall be removed.</b> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th></th> <th>Temperature</th> <th>Time</th> </tr> </thead> <tbody> <tr> <td rowspan="5" style="writing-mode: vertical-rl; transform: rotate(180deg);">1 cycle</td> <td>-10±2°C</td> <td>2(hour)</td> </tr> <tr> <td>-10~65°C</td> <td>1</td> </tr> <tr> <td>65±2°C</td> <td>2</td> </tr> <tr> <td>65~-10°C</td> <td>1</td> </tr> </tbody> </table>				Temperature	Time	1 cycle	-10±2°C	2(hour)	-10~65°C	1	65±2°C	2	65~-10°C	1	接触电阻：≤200mΩ Contact resistance: ≤200mΩ 项目 3,4.1,4.2,4.3 Item 3,4.1,4.2,4.3
	Temperature	Time															
1 cycle	-10±2°C	2(hour)															
	-10~65°C	1															
	65±2°C	2															
	65~-10°C	1															
	APPROVE BY		黄蜀东 09.02.15	CHECKED BY	关林 09.02.15	PRPARE BY											
					曹 盖 09.02.15												

# APPROVAL SPECIFICATIONS

CUSTOMER		CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
			KAN0652	TACT SWITCH	A
项目 ITEM		试验条件 TEST CONDITIONS			要求 REQUIREMENTS
4	湿温测试 Moisture resistance	<p>样品应放在常温及标准湿度的环境中 1 小时后，根据下面的测试要求进行测试：</p> <p>Following the test set forth below the sample shall be left in normal temperature and humidity conditions for 1 h before measurements are made:</p> <ul style="list-style-type: none"> <li>(1) 温度: <math>60 \pm 2^\circ\text{C}</math> temperature: <math>60 \pm 2^\circ\text{C}</math></li> <li>(2) 相对湿度: 90%~95% relative humidity: 90% to 95%</li> <li>(3) 时间: 96h time: 96h</li> </ul>	<p>接触电阻: <math>\leq 200\text{m}\Omega</math> Contact resistance: <math>\leq 200\text{m}\Omega</math></p> <p>项目 3,4.1,4.2,4.3 Item 3,4.1,4.2,4.3</p>		
5	硫化试验 Sulfuration resistance	<p>样品应放在常温及标准湿度的环境中 1 小时并重复 2~3 次后，根据下面的测试要求进行测试：</p> <p>Following the test set forth below the sample shall be left in normal temperature and humidity conditions for 1 h and repeat two to three times before measurements are made:</p> <ul style="list-style-type: none"> <li>(1) H<sub>2</sub>S 气体浓度: <math>3\text{ppm} \pm 1\text{ppm}</math> H<sub>2</sub>S gas concentration: <math>3\text{ppm} \pm 1\text{ppm}</math></li> <li>(2) 时间: 72h Time: 72h</li> <li>(3) 温度: <math>40 \pm 2^\circ\text{C}</math> (90~95%RH) temperature: <math>40 \pm 2^\circ\text{C}</math> (90~95%RH)</li> </ul>	<p>接触电阻: <math>\leq 200\text{m}\Omega</math> Contact resistance: <math>\leq 200\text{m}\Omega</math></p> <p>项目 3,4.1,4.2,4.3 Item 3,4.1,4.2,4.3</p>		
6	盐雾试验 Salt Mist	<p>在以下设定条件下进行测量：</p> <p>The switch shall be checked after following test:</p> <ul style="list-style-type: none"> <li>(1) 温度: <math>35^\circ\text{C} \pm 2^\circ\text{C}</math> temperature: <math>35^\circ\text{C} \pm 2^\circ\text{C}</math></li> <li>(2) 盐溶液浓度: <math>5 \pm 1\%</math> (质量百分比) salt solution: <math>5 \pm 1\%</math> (solids by mass)</li> <li>(3) 时间: <math>8\text{h} \pm 1\text{h}</math> Time: <math>8\text{h} \pm 1</math> hour</li> </ul> <p>实验后的盐沉积物后水冲掉 After test, salt deposit shall be removed by running water.</p>	<p>金属件上没有腐蚀斑点 No remarkable corrosion shall be recognized in metal part.</p>		
APPROVE BY		黄蜀东 09.02.15	CHECKED BY	关林 09.02.15	PRPARE BY
					曹 盖 09.02.15

# APPROVAL SPECIFICATIONS

CUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
		KAN0652	TACT SWITCH	A

## 6、极限机械性能:

### ENDURANCE SPECIFICATION

项目 ITEM	试验 条件 TEST CONDITIONS	要求 REQUIREMENTS									
1 工作寿命 Operation life	<p>根据下面的测试要求进行测试:  Measurement shall be made following the test set forth below:</p> <p>(1) DC 12V, 50mA 带负载  DC 12V, 50 mA resistive load</p> <p>(1) 按动速率: 2~3 次/秒  Rate of operation: 2 to 3 times/s</p> <p>(3) 按力: 按力的 1.5 倍  Operating Force: Operating Force 1.5 倍</p> <p>(4) 平均无故障寿命: Average fault-free life</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>A</td><td>1.0</td><td>100000 次</td></tr> <tr> <td>B</td><td>1.6</td><td>80000 次</td></tr> <tr> <td>C</td><td>2.6</td><td>60000 次</td></tr> </table>	A	1.0	100000 次	B	1.6	80000 次	C	2.6	60000 次	接 触 电 阻 ≤200mΩ Contact resistance ≤200mΩ 触点弹力≤10ms Contact bounce ≤10ms 按力：初值的 ±30% Operating Force: initial value ±30% 项目 3,4.1,4.2,4.3 Item 3,4.1,4.2,4.3
A	1.0	100000 次									
B	1.6	80000 次									
C	2.6	60000 次									
2 振动 Vibration	<p>根据以下给定条件进行测试:  Measurement shall be made following the test set forth below:</p> <p>(1) 振动频率范围: 10~55~10Hz  Vibration frequency range: 10 to 55 to 10Hz</p> <p>(2) 振幅 (峰一峰): 1.5mm  Amplitude: 1.5mm</p> <p>(3) 振动方向: 包括手柄行程方向在内的三个相互垂直的方向  Direction of vibration: Three mutually perpendicular direction including the direction of stem travel</p> <p>(4) 测试时间: 每次 2hours .  Duration: Each 2hours.</p>	项目 3,4.1,4.2,4.3 Item 3,4.1,4.2,4.3									

APPROVE BY

黄蜀东 09.02.15

CHECKED BY

关林 09.02.15

PRPARE BY

曹 盖 09.02.15

# APPROVAL SPECIFICATIONS

CUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
		KAN0652	TACT SWITCH	A

## 7. 焊接条件:

### SOLDERING CONDITIONS:

项目 ITEM		推荐条件 Recommended conditions	
7.1	手工焊接 Hand soldering	<p>请按以下条件进行焊接:</p> <p>(1) 焊锡温度: <u>≤350</u>℃</p> <p>(2) 连续焊接时间: <u>≤3</u> s</p> <p>Please practice according to below conditions:</p> <p>(1) Soldering temperature: <u>350</u>℃ Max.</p> <p>(2) Continuous soldering time: <u>3</u> s Max.</p>	
7.2	自动浸焊 Conditions for Auto-dip	项目 Items	条件 Condition
		助焊剂附着量 Flux built-up	不附着于零部件贴装面的程度 Mounting surface should not be coated with flux
		预热温度 Preheating temperature	印刷电路板焊接面的周围温度 100℃ max. Ambient temperature of the soldered surface of PC board. 100℃ max.
		预热温度时间 Preheating time	60s max.
		焊接温度 Soldering temperature	260℃ max.
		焊接浸渍时间 Continuous dipping time	5s max.
		焊接次数 Number of soldering	2 次以下 2times max.

说明:



- 建议选用含助焊剂 3%以上的锡膏，并避免助焊剂进入开关内而导致开关失效。
- 设计按压推柄时，请参考所提供的图示，切勿以尖状物直接按压开关，且推柄需垂直置于开关中心位置按压，并将推柄摇晃度控制在±3°以内。
- 开关焊接加工时，应特别注意将温度及时间控制在 260℃±2℃、5 秒内，否则过高的温度及过长的时间会导致开关的损坏或使用寿命减短。
- 焊接加工时开关应保持 OFF 状态，以避免开关损坏。

APPROVE BY	黄蜀东 09.02.15	CHECKED BY	关林 09.02.15	PRPARE BY	曹 盖 09.02.15
------------	--------------	------------	-------------	-----------	--------------



技术要求:  
1、此产品技术要求详细参见《产品规格书》;  
2、H表示产品总高;  
3、未注公差: ±0.1mm;

电路图

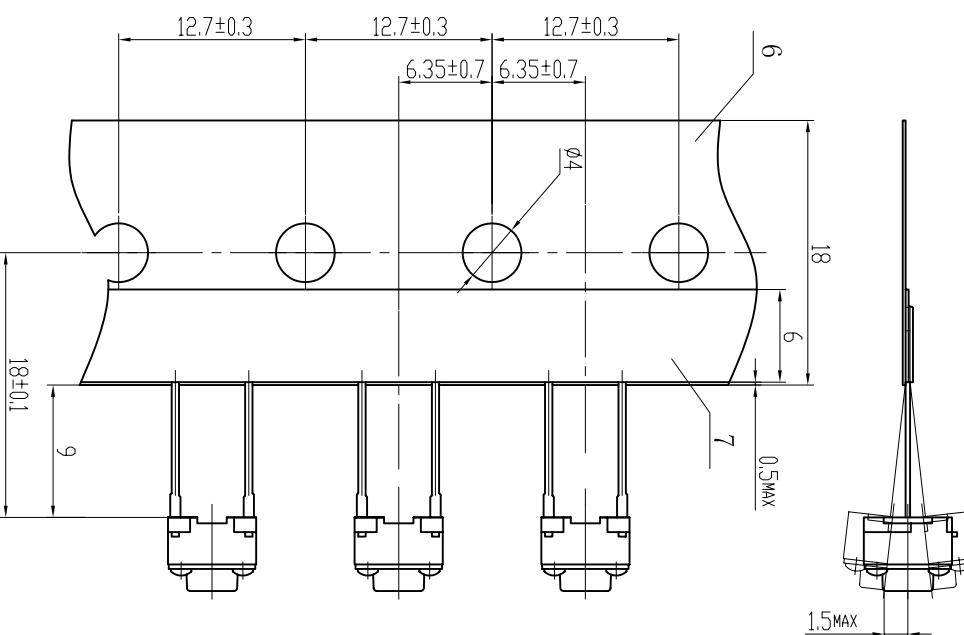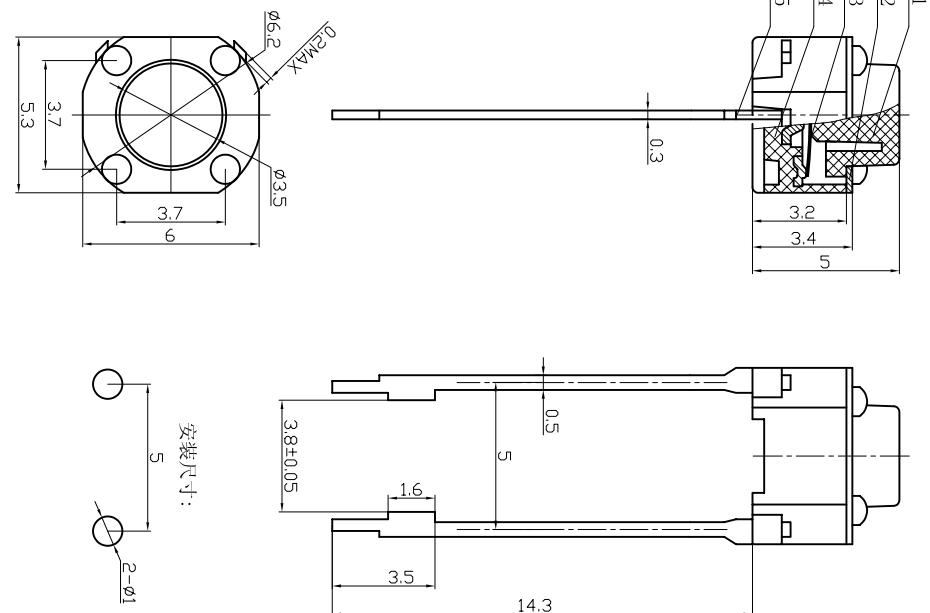

序号	部件名称	图号	材料	材料规格及牌号	数量	备注
7	胶带					
6	纸带					
5	手柄	ARA07.870.070	增强尼龙	PA66	1	黑色
4	盖板	ARA08.010.010	高精铜	H65Y t=0.2mm	1	
3	簧片	8WGY.557.001	覆银铜箔	F.AG/5210-EH TA	1	镀银
2	底座	ARA3.604.036	增强尼龙	PA66	1	黑色
1	接线片	ARA07.750.017	高精铜	H65Y t=0.3mm	1	镀银

编带图纸						
温州港源电子有限公司						
标记	处数	更改文件号	签字	日期		
设计	曹	盖	关林	材料	HRC	
绘图	曹	盖		图样标记		重量
会	会	会				
批准	黄蜀东					
日期	08.01.23					
其 1 页						
第 1 页						

KAN0652

ARA03.604.038